

EUROCHANNEL™ Dry Fix Channel

Dry Fix Channel is adjustable channel used to support 12mm and 15mm glass for balustrades and pool fences. Suitable for all fixing substrates, including timber.

Dry Fix features a removable cover plate and eliminates the need for grouting, enabling faster and cleaner installation.





Available finishes

- Mill aluminium, ex stock
- Silver Pearl powdercoated, ex stock
- Powdercoated as required (lead time applies)


Technical details

- 5M stock length, supplied complete with 12 Clamping Kits and Cover Plate
- Made from aluminium
- End caps available
- Vertical adjustment up to 15mm
- Out of plumb adjustment:
 - +/- 50mm @ 1000mm high
 - +/- 60mm @ 1200mm high
- M12 coach screw at 200mm centres fixing in timber
- M12 s/s epoxy bolts at 450mm centres fixing in concrete
- Clamping kits should be spaced up to 400mm apart
- 100mm minimum embedment into timber or concrete
- Supporting base channel is anotec powder-coated with a ten year warranty
- PS1 available on request

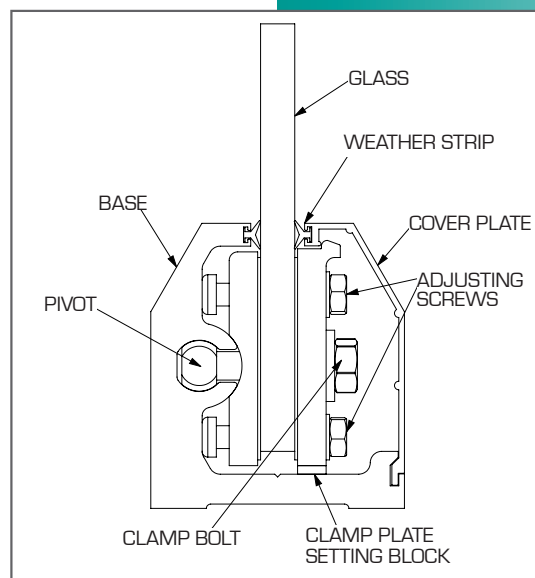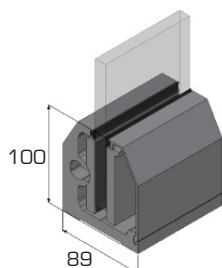

Care instructions

Refer to our website www.euroglass.co.nz for the After-Care of powdercoated surfaces.

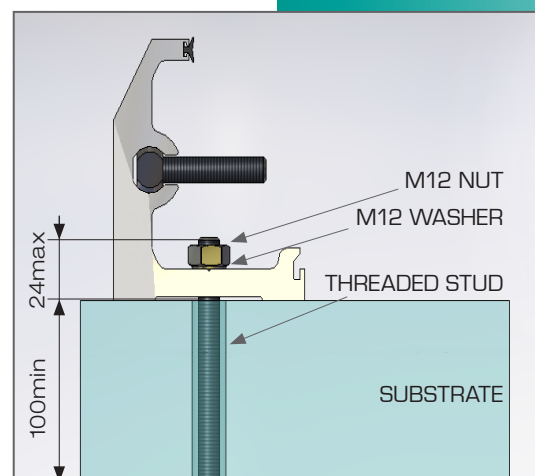

tel: **0800 387 645** Installation sales
(09) 624 1180 Trade sales & technical enquiries

web: www.euroglass.co.nz